

**FEATURES - Sydney \*LL-1750**

- Available in:



**ALUMINIUM -AL**

- Clear anodized aluminum finish
- The anodized aluminum 6360 T5 is used for better dissipation of heat

- The components are certified
- These products are manufactured in Canada
- In lengths of 8 feet

**DIFFUSER - Accessories**

The **OPALINE** diffuser allows to pass **55%** of luminosity, **FROST 85%** and **CLEAR 98%**




**OPALINE**  
LL-1750-8-OPA

**FROST**  
LL-1750-8-FROST

**CLEAR**  
LL-1750-8-CLEAR

Material: ACRYLIC DR

**POLYCARBONATE**  
LL-1750-8-POLY

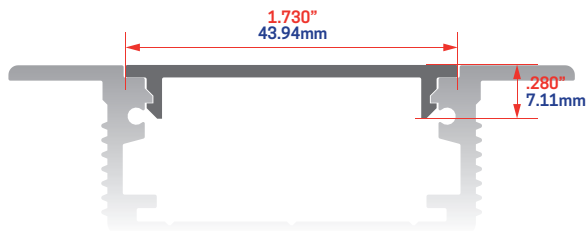

**END CAP - Accessories**

- Available in:



**ALUMINIUM -AL**



**END CAP**  
LL-1750EC (ALUMINIUM)


Material: Anodized aluminium,  
fixed with screws

**MOUNTING BRACKET - Accessories**




**MOUNTING BRACKET**  
LL-1750STY

Material: POLYSTYRENE

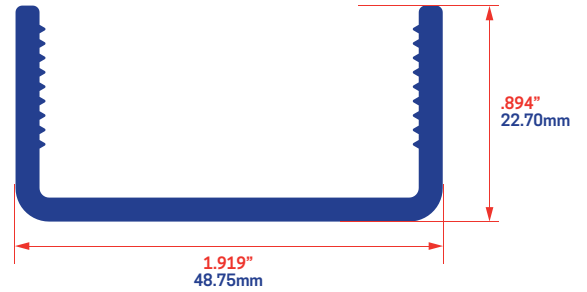

**MOUNTING APPLICATION - Sydney \*LL-1750**

**SYDNEY - LL-1750-8**

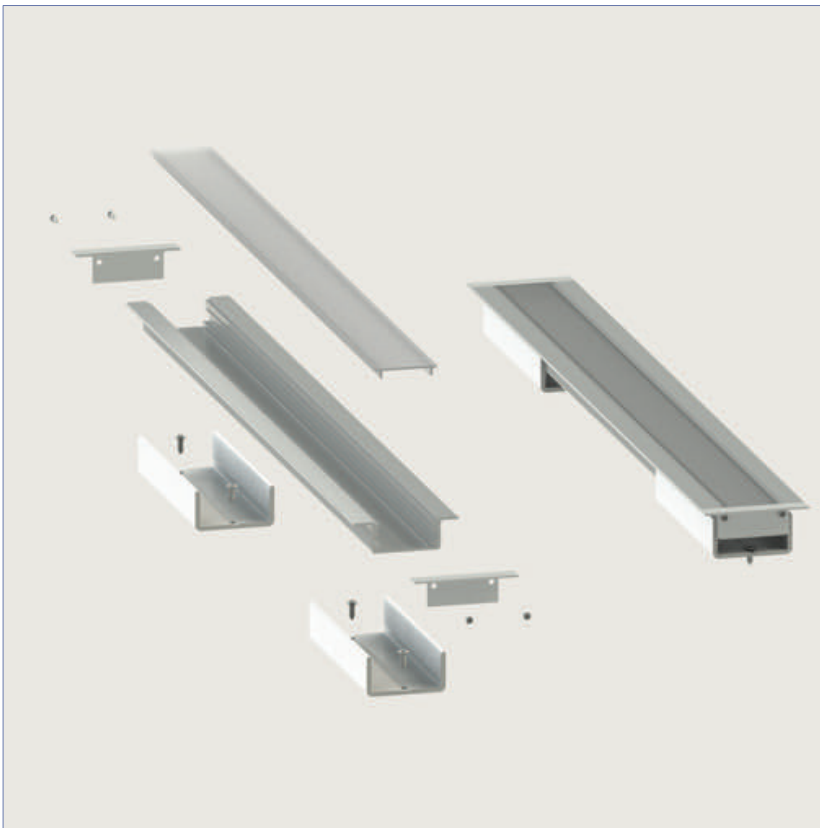

**INSTALLATION**

- 1 - Cut the mount and the mounted diffuser.
- 2 - Put the LED strips or ribbons.
- 3 - When necessary, use the styrene support for fixing the profile to the building.

**CODES**

---

**SYDNEY**

**EXTRUSION**

**ALUMINIUM** - LL-1750-8-AL

**DIFFUSER**

**OPALINE** - LL-1750-8-OPA

**FROST** - LL-1750-8-FROST

**CLEAR** - LL-1750-8-CLEAR

**POLYCARBONATE** - LL-1750-8-POLY

**END CAP** (Anodized aluminium, fixed with screws)

**STANDARD** - LL-1750EC-AL

**MOUNTING BRACKET**

**POLYSTYRENE** - LL-1750STY